

KOKUSAI DENKI

High Performance, Multi-format Compact, HDTV Box Camera

DK-H200



The DK-H200 is a high-performance special application HDTV camera that is ideal for point of view and remote observation applications. With its new developed 2.6 million pixels 3-MOS sensor, the DK-H200 provides outstanding performance. The camera offers sharper and cleaner HD images due to KOKUSAI DENKI's implementation of the latest digital processing technology. The camera achieves outstanding high sensitivity and no vertical smear specification.

Features

● Image Sensor

The 2.6 million pixels 2/3-inch native 1080p MOS image sensor.

● Multi-format

Various formats are able to be selectable.

Video Format : 1080p, 1080i, 720p

Frame Rate : 59.94 Hz, 50 Hz, 60 Hz

● High sensitivity and Signal to Noise ratio

Low-noise circuit technology provides a signal to noise ratio of 60dB. Even at high gain, clear images are obtained with little noise.

The standard sensitivity is F12(59.94 Hz), F13(50 Hz) at 2000 lx.

The sensitivity can be increased by Master Gain and long exposure mode to reproduce dark images with a minimum illumination of 0.002 lx at F1.4.

● Full Auto

The built-in Automatic Exposure System (AES), Automatic Gain Control (AGC) and automatic iris maintain the video level even with rapidly changing light intensity.

Full-time Auto White balance (FAW) corrects in real-time for color temperature variations due to changing types of lighting conditions on the scene object.

● DSP(Digital Signal Processing) provide advanced image handling and adjustment functions

- Real-time Lens Aberration Correction (RLAC)
Lens chromatic aberration of magnification is reduced by digital processing with supporting lenses.
- Knee saturation and auto-knee
- 12-Vector and Linear Matrix masking
- Ultra Gamma
- Gray Scale Automatic Setup
- Automatic White Shading

● Extensive User-Friendly Features

- Focus assist
Focus assist indicator can be displayed on VF Out and viewfinder for easy focusing.
- Eight scene files
The scene file is provided to store and recall functions such as gain, detail, masking, gamma and other settings.
- Eight lens files
The lens file is provided to store and recall such as white shading, iris speed, iris open limit, and iris close limit.
- ECC (Electric Color Compensating) filter
- IRIS control is available from on screen menu
- Peak/average rate selection for auto level control

Specifications

Image sensor	2/3-inch, MOS image sensor Total pixels 2,270 (H) × 1,144 (V) 2.6 million pixels Effective pixels 1,920 (H) × 1,080 (V)
Signal format	1080p, 1080i, 720p
Optical Filter	1x motorized filter wheel ND(CLEAR, 1/4 ND, 1/16 ND, 1/64 ND)
ECC	3200 K, 4300 K, 5600 K, 6300 K, 8000 K
HD Resolution	1100TVL
HD SNR	60dB(HD-SDI output decode Y channel)
Sensitivity	1080/59.94p, 59.94i, 60p, 60i : F12 @ 2000 lx, 3200 K, 89.9% reflectance 1080/50p, 50i : F13 @ 2000 lx, 3200 K, 89.9% reflectance
Minimum illumination	0.002 lx (at F1.4, 36dB Video Gain+36dB frame accumulation mode)
Vertical Smear	No smear
Gain selection	L (low) -3/0dB M (medium) 0/+3/+6/+9/+12/+15/+18/+21dB H (high) +3/+6/+9/+12/+15/+18/+21/+24/+27/+30/+33/+36dB
Modulation Depth	Min 50% (16 : 9 @27.5 MHz)
Shutter	Preset mode 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 second (59.94p, 59.94i, 60p, 60i) 1/60, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 second (50p, 50i)
	VAR scan mode 1/60.15 to 1/9633, 1.07 to 0.03 second (59.94p, 59.94i, 60p, 60i) 1/50.17 to 1/11250, 1.28 to 0.04 second (50p, 50i)
	AES mode Automatic video level control by shutter speed.
Dimensions	99(W) x 105(H) x 155(D) mm (excluding protrusions)
Power Consumption	approx. 18 W (DC 12 V)
Temperature range	Operation -10 °C to +45 °C, 14 °F to +113 °F Storage -20 °C to +60 °C, -4 °F to +140 °F
Mass	approx. 1.3 kg (2.9 lbs)

Input / Output

Gen-Lock Input	BNC for Tri-level sync or Black Burst
SDI Output	MON OUT:1 x BNC HD-SDI out (Character ON/OFF) SDI OUT:1 x BNC HD-SDI out
Remote Control	1:4-pin Multi connector for Remote Control Unit 2:8-pin RJ-45 connector for 10BASE-T/100BASE-T
Lens Control	12-pin Multi LENS connector
VF Output	15-pin D-SUB connector for VF
Power supply Input	4-pin XLR connector DC 12 V (10.5 V to 17 V)


Standard composition

Camera Head DK-H200	1
Lens Mount Cap	1
Operating Instructions	1

Accessories

Remote Control Unit	RU-1000VR / RU-1500JY
Setup Control Unit	SU-1000
AC adaptor	IA60a (I.D.X)
Lens Extension Cable	ECE-R22(0.22 m)(FUJIFILM)

Dimensions

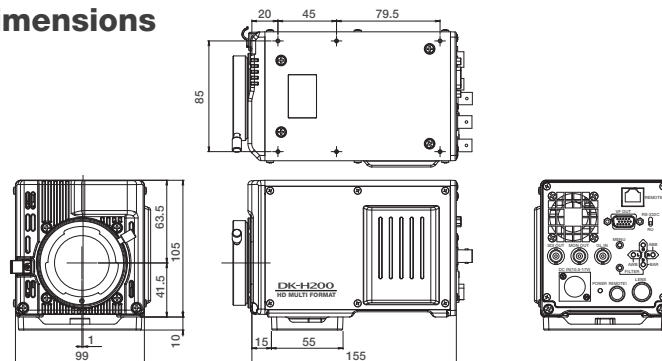

⚠ CAUTION : To ensure safe operation, please read the instruction manual before using this product.

KOKUSAI DENKI Electric Inc.

URL : <https://www.kokusaidenki.co.jp/global/en/Index.html>

32, Miyuki-cho, Kodaira-shi, Tokyo 187-8511, Japan
Phone : +81-42-322-3111, Fax : +81-42-322-3303

KOKUSAI DENKI Electric Asia Pte. Ltd.

URL : <https://www.kokusaidenki.com.sg>

9 Tampines Grande, Asia Green, #02-00,
Singapore 528 735
Phone : +65-6911-6794

KOKUSAI DENKI Electric America, Inc.

URL : <https://www.kokusaidenki.us>

Headquarters

104 Feeding Hills Road Southwick, MA 01077, U.S.A.
Toll Free : +1 (833) 227-1658,
Phone : +1 (669) 207-5038

West Office

11258 Monarch Street, Unit H
Garden Grove, CA 92841, U.S.A.

West Sales

Phone : +1 (516) 682-4448

East Sales

Phone : +1 (516) 682-4445

Midwest Sales

Phone : +1 (516) 682-4450

KOKUSAI DENKI Electric Europe GmbH

URL : <https://www.kokusaidenki.eu>

Frankfurt Head Office

Siemensstr. 9, D-63263 Neu-Isenburg, Germany
Phone : +49 (0) 6102-8332-0, Fax : +49 (0) 6102-8332-499

London Office

Orion House, Bessemer Road, Welwyn Garden City, Herts,
AL7 1HH, UK
Phone : +44 (0) 7808 330195

KOKUSAI DENKI Electric Linear S/A

URL : <https://www.kokusaidenki.com.br>

Avenida Frederico de Paula Cunha, 1001 - Maristela
Santa Rita do Sapucaí - MG - Brasil - CEP: 37540-000
Phone : +55 (35) 3473-3473, Fax : +55 (35) 3473-3474